



Ślizg z zaślepką do profili kwadratowych i prostokątnych

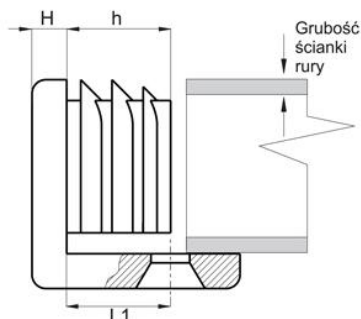

Symbol	A	B	m	H	h	L1	d	Grubość ścianki
021.001	20	20	5	5	24.5	24.5	M5	1.5-2.0
021.002	25	25	5	5	19.5	14	M5	1.5-2.0
021.003	30	15	7	3	15.	19.5	M5	1.5-2.0
021.004	30	20	5	5	14.5	17	M5	1.5-2.0
021.005	30	25	6	5.5	14.5	20	M5	1.5-2.0
021.006	30	30	5	5	26.5	20	M5	1.5-2.0
021.007	35	20	5	5	15	25.5	M5	1.5-2.0
021.008	35	25	5	5	14.5		M5	1.5-2.0
021.009	40	20	5	5	14.5	41	M5	1.5-2.0
021.010	40	25	8	5	14.5	31	M5	1.5-2.0
021.011	40	30	5	5	17.5		M5	1.5-2.0
021.012	50	20	5	5	14.5		M5	1.5-2.0
021.013	50	25	8	5	14.5	40	M5	1.5-2.0
021.014	50	30	7	5	15	25.5	M5	1.5-2.0

→ Materiał: polietylen

→ Kolor standardowy: czarny lub biały

→ RAL lub kolory specjalne na zamówienie