


Dławnica kablowa z tworzywa z gwintem PG



- Materiał: poliamid 6, V0 wg UL 94, UV stabilizowany
- Stopień zabezpieczenia: IP 68 do 5 bar, wodoszczelny
- Kolor: szary lub czarny
- Gwint rurowy.

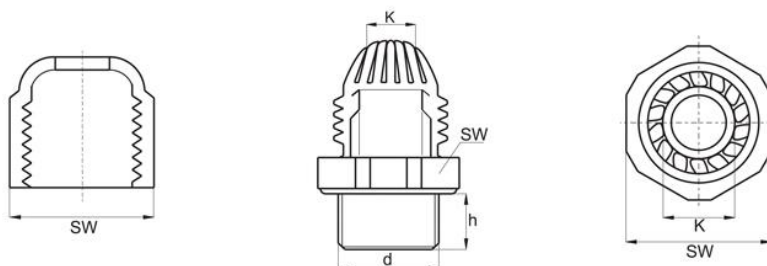

Symbol	d	K - zakres zaciskania	h	SW
676.001	PG 7	3,0-6,5	8	15
676.002	PG 9	4,0-8,0	8	19
676.003	PG 11	4,5-10,0	8	22
676.004	PG 13,5	6,0-12,0	9	24
676.005	PG 16	10,0-14,0	11	27
676.006	PG 21	13,0-18,0	11	33
676.007	PG 29	18,0-25,0	11	42
676.008	PG 36	22,0-32,0	13	53
676.009	PG 42	30,0-38,0	13	60
676.010	PG 48	34,0-44,0	14	65