


Dławnica kablowa z tworzywa z gwintem metrycznym



- Materiał: poliamid 6, V0 wg UL 94, UV stabilizowany
- Stopień zabezpieczenia: IP 68 do 5 bar, wodoszczelny
- Kolor: szary lub czarny
- Gwint rurowy.

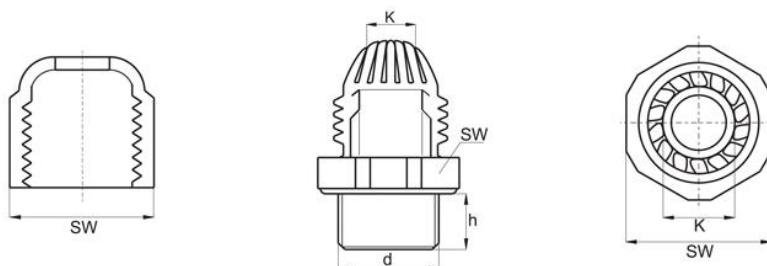

| Symbol | d | K - zakres zaciskania | h | SW |
|---------|-----------|-----------------------|----|----|
| 677.001 | M12 x 1,5 | 3,0-6,5 | 8 | 15 |
| 677.002 | M16 x 1,5 | 4,0-8,0 | 8 | 19 |
| 677.003 | M20 x 1,5 | 4,5-10,0 | 9 | 24 |
| 677.004 | M25 x 1,5 | 6,0-12,0 | 10 | 30 |
| 677.005 | M32 x 1,5 | 10,0-14,0 | 10 | 36 |
| 677.006 | M40 x 1,5 | 13,0-18,0 | 10 | 46 |
| 677.007 | M50 x 1,5 | 18,0-25,0 | 12 | 55 |
| 677.008 | M63 x 1,5 | 22,0-32,0 | 12 | 66 |